

BiOWiSH® Aqua

BiOWiSH® Restores Sparkling Waters at The Summer Palace, Beijing, China



Background

Upon its designation by UNESCO as a World Heritage Site in 1988, the Summer Palace (颐和园Yíhéyuán) was declared "a masterpiece of Chinese landscape garden design. The natural landscape of hills and open water is combined with artificial features such as pavilions, halls, palaces, temples and bridges to form a harmonious ensemble of outstanding aesthetic value." The Summer Palace covers an area of 2.9 km² (three quarters of which are water) in NW Beijing and is visited by over 15 million tourists a year.

In hopes of replacing the use of chemicals and reducing the many hours of labor needed to maintain adequate water quality in the Palace's numerous ornamental water bodies, maintenance officials reached out to Beijing Guodian Futong Technology Co. (GDFT), a subsidiary company of NARI Group, to provide an all-natural maintenance solution.

A body of water in front of the Buddha incense court was selected as a test case for the technology. The small pond, with an estimated surface area of 100 m², had to be cleared of floating plants on a weekly basis. Although it is connected to the neighboring Kunming Lake, it has poor exchange with outside water. Through examination of water quality indicators, Total Nitrogen (TN) and Total Phosphorus (TP) were found to be above the compliance levels for Standard IV, as established in the Surface Water Environmental Quality Standard Basic Project Standard Limit, published by the Chinese government. As the temperature increases, floating plants and algae blooms start to appear and manual cleaning frequency needs to be increased, adding to the overall maintenance costs of the Palace.

Objectives

By implementing a bioremediation program with BiOWiSH® Aqua, the Palace's maintenance officials hope to reduce labor costs while replacing the use of dangerous bio-accumulative chemicals to maintain the water quality compliant with Standard IV.

BiOWiSH® Aqua



- Rapid nitrification and denitrification in aerobic and anaerobic conditions
- Reduces sludge production
- Increases plant treatment capacity
- Reduces odors
- Reduces aeration requirements
- Reduces need for chemical additives
- Improves plant stability
- Pre-treats influent in collection systems
- Natural and non-toxic

Available Sizes

- 100g/3.5oz
- 1kg/2.2lbs
- 5kg/11lbs
- 10kg/22lbs

Surface Water Environmental Quality Standard Limited Value									
Series #	Standard Values Categories Index	I	II	III	IV	V			
1	Water Temperature (°C)	Man-made environmental temperature changes should be limited: Average Weekly Maximum Temperature Rise ≤ 1 Average Weekly Maximum Temperature Drop ≤ 2							
2	pH value (Dimensionless)	6~9							
3	Dissolved Oxygen (DO) ≥	Saturation factor 90% (or 7.5)	6	5	3	2			
4	Potassium Permanganate Index ≤	2	4	6	10	15			
5	Chemical Oxygen Demand (COD $KMn0_4$) \leq	15	15	20	30	40			
6	Biochemical Oxygen Demand $(BOD_5) \le$	3	3	4	6	10			
7	Ammonia-Nitrogen (NH₃-N) ≤	0.15	0.5	1.0	1.5	2.0			
8	Total Phosphorous (Measured as P) ≤	0.02 (Lake or reservoir, 0.01)	0.1 (Lake or reservoir, 0.025)	0.2 (Lake or reservoir, 0.05)	0.3 (Lake or reservoir, 0.1)	0.4 (Lake or reservoir, 0.2)			
9	Total Nitrogen (Lake, Reservoir, Measured as N) ≤	0.2	0.5	1.0	1.5	2.0			


Solution

A three-phase dosing program of BiOWiSH® Aqua was implemented.


Dosing Scheme							
Dosing Phase	BiOWiSH® Aqua	Dosing Frequency	Objective	Notes			
Phase 1 Day 0 - 21	3 kg	Three times per week	Target dose of 3 ppm to favor the growth of BiOWiSH® organisms. Suggest keeping manual plant removal for this phase.	Solid product is to be dissolved into 30 L of fresh water and sprayed over the surface of the lake uniformly (we recommend the use of a			
Phase 2 Day 21- j*	1 kg	Weekly	Maintain 1.0 ppm dose until the TN and TP levels are compliant with Standard IV.				
Phase 3 Day j* onwards	0.5 kg	0.5 kg Weekly Reduce the cost down to an optimization ph @ 0.5 ppm while maintaining compliance wi Standard IV.		backpack spraying unit)			

^{*}Day j is the day at which the water reaches ideal quality and it is time to start ongoing maintenance.


Results

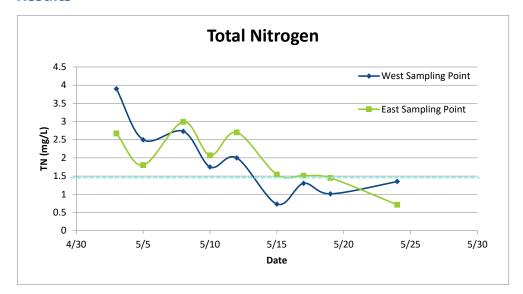

Within **two weeks** of dosing BiOWiSH® Aqua, TN was reduced to comply with Standard IV (TN ≤ 1.5 ppm).

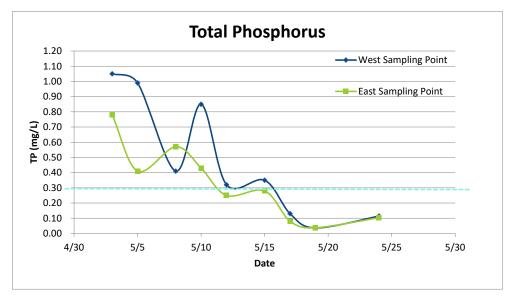

Within **ten days** of dosing BiOWiSH® Aqua, TP was reduced to comply with Standard IV (TP \leq 0.3 ppm).

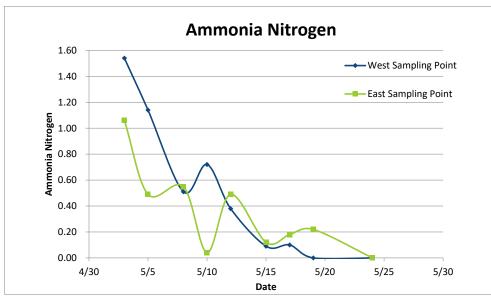

The effects on ammonia nitrogen levels were even more dramatic.

Ten days after the initial dosing of BiOWiSH® Aqua, ammonia N levels were < 0.1 ppm (realizing over **90% reduction** from initial values).

The powerful microbial blend formulated into BiOWiSH® Aqua can express the needed enzymes to promote rapid nutrient elimination, while enabling the existing microorganisms in the ecosystem to make better use of the available nutrient resources. This rapid degradation in ammonia, coupled with increased nitrogen elimination, contribute to combined NH₃-N and TN reductions. Changes in the microbial composition of the water body and improved nutrient absorption by existing flora contribute to TP reductions in the water column.

The rate of algae and surface plant growth was recorded upon each dosing event. Manual surface cleaning was the most time consuming of the pre-BiOWiSH® application weekly activities. After one week dosing BiOWiSH® Agua, manual cleaning could be stopped as maintenance noted a dramatic reduction in the rate of surface plant growth.



Fig. 1 Water before weekly manual cleaning



Fig. 2 Two days after manual cleaning, before



Fig. 3 One week after dosing BiOWiSH® Aqua



Fig. 4 Ten days after dosing BiOWiSH® Aqua



Fig. 5 Two weeks after dosing BiOWiSH® Aqua

Conclusion

Bioaugmentation with BiOWiSH® Agua has proven to be a sustainable, low cost, all-natural means to replace the use of chemicals. Additionally, this solution reduced the labor needed to maintain water quality within the National Water Standard IV. BiOWiSH® Aqua's robust biochemistry provides a powerful, easy-to-dose biological alternative to the regular maintenance of the different types of water bodies in the 2.9 km² Summer Palace.

Implementing such a biological tool in this high-profile location visited by over 15 million tourists a year will realize significant cost savings. It will also avoid the use of large quantities of harsh chemicals from being used in a protected environment every year.



wastewater@biowishtech.com Tel: +1 312 572 6700 Fax: +1 312 572 6710

biowishtech.com